
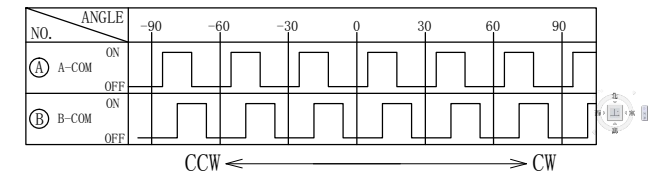


⑫	Crimping Terminal	—	4	Phosphor Copper	Plating Sn	
⑪	Housing	—	1	PA66	White	
⑩	Heat shrink tube	—	1	PVC	Black	
⑨	Wire	—	4	Tinned Copper wire	Black/Green/Yellow/White	
⑧	Fixed Plate	—	1	Stainless Steel	—	—
⑦	Revolving Wheel	—	1	NYLON	Black	
⑥	Contact	—	1	Phosphor bronze	—	—
⑤	Base	—	1	NYLON	Black	
④	Shell	—	1	Iron	Plating Silver	
③	Terminal	—	1	Brass(0.2t)	Plating Silver	—
②	Terminal	—	1	Brass(0.2t)	Plating Silver	—
①	Terminal	—	1	Brass(0.2t)	Plating Silver	—
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK

Rating	5VDC 1mA
Contact Resistance	500mΩ Max
Insulation Resistance	50MΩ Min
Dielectric Voltage	250VAC 60±5S
Endurance	100,000 cycles
Rotational Force	0-15gf.cm

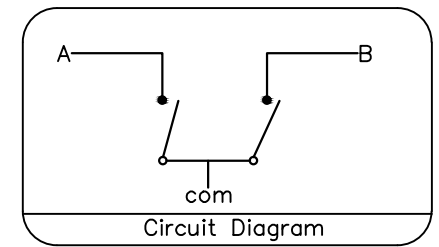

Numbers of detent: 12  
Pulse/Rotation: 12 Pulse/360° (reverse)

备注：底座背面的压针孔○是根据产品模具成型要求而定的，其规格的大小与数量的多少对产品结构、功能及使用无任何影响。