



1.ELECTRICAL RATINGS

16(8)A 125/250VAC 25T125
1/4HP 250VAC (UL61058);

16(8)A 125/250VAC 25T125 5E4
(IEC61058).

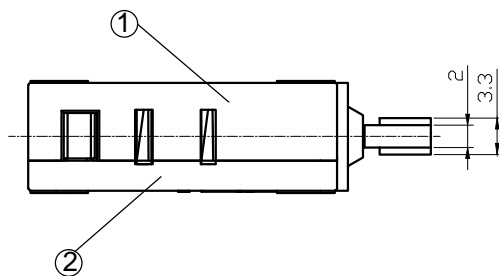

ITEM	DESCRIPTION	MATERIAL
01	COVER	PBT
02	BASE	PBT
03	BUTTON	PBT
04	TERMINAL	SILVER PLATE COPPER ALLOY
05	TERMINAL	SILVER PLATE COPPER ALLOY
06	CONTACT	Ag ALLOY/Cu
07	SPRING	SILVER PLATE COPPER ALLOY
08	MOVE PLATE	SILVER PLATE COPPER ALLOY
09	MOVE SHAFT	SILVER PLATE COPPER ALLOY

2.CHARACTERISTICS

Operating Force	160±40 gf
Release Force	15 gf min
Pretravel	2.7 mm max.
Overtravel	0.9mm min
Movement Differential	0.4mm max.
Operating Posttion	14.7±0.5mm