




Item 项目	Components 零件部分	Material Article 材料
1	Stem 推柄	PPA
2	Cover 盖板	Brass (Sn Plating) 黄铜镀锡
3	Dome 簧片	SUS (Contact side silver plating) 不锈钢镀银
4	Housing 本体	PPA
5	Terminal 端子	Brass strip silver clothed 黄铜镀银

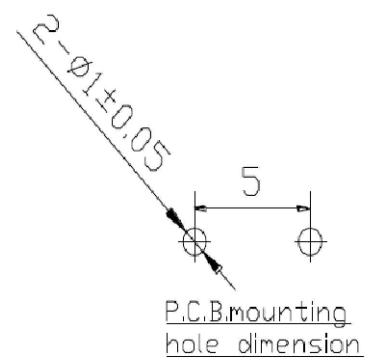

Model X	DIM-h	DIM-A
A	4.3	Ø3.5
N6	4.5	Ø3.5
B	5.0	Ø3.5
C	7.0	Ø3.4
D	9.5	Ø3.1
I	8.5	Ø3.3
Q	6.0	Ø3.5
T	5.6	Ø3.5
L	8.0	Ø3.3
Na	9.0	Ø3.2
NK	7.5	Ø3.4
Nh	10.0	Ø3.1



Circuit diagram



Model 型号	Actuating Force(gf) 动作力	Return Force(gf) 回复力
TSCTX-1L	100 ± 30	10gf Min.
TSCTX-21L	160 ± 50	50gf Min.
TSCTX-31L	260 ± 70	

The length	Tolerance range
L ≤ 10	±0.3
10 < L ≤ 100	±0.5
100 < L	±0.6

unit:mm